




INSTRUCTION MANUAL MOUNTING ACRYLIC GLASS



**Created by Grigg Audio Solutions
on 15.06.2022 Version 1.0**

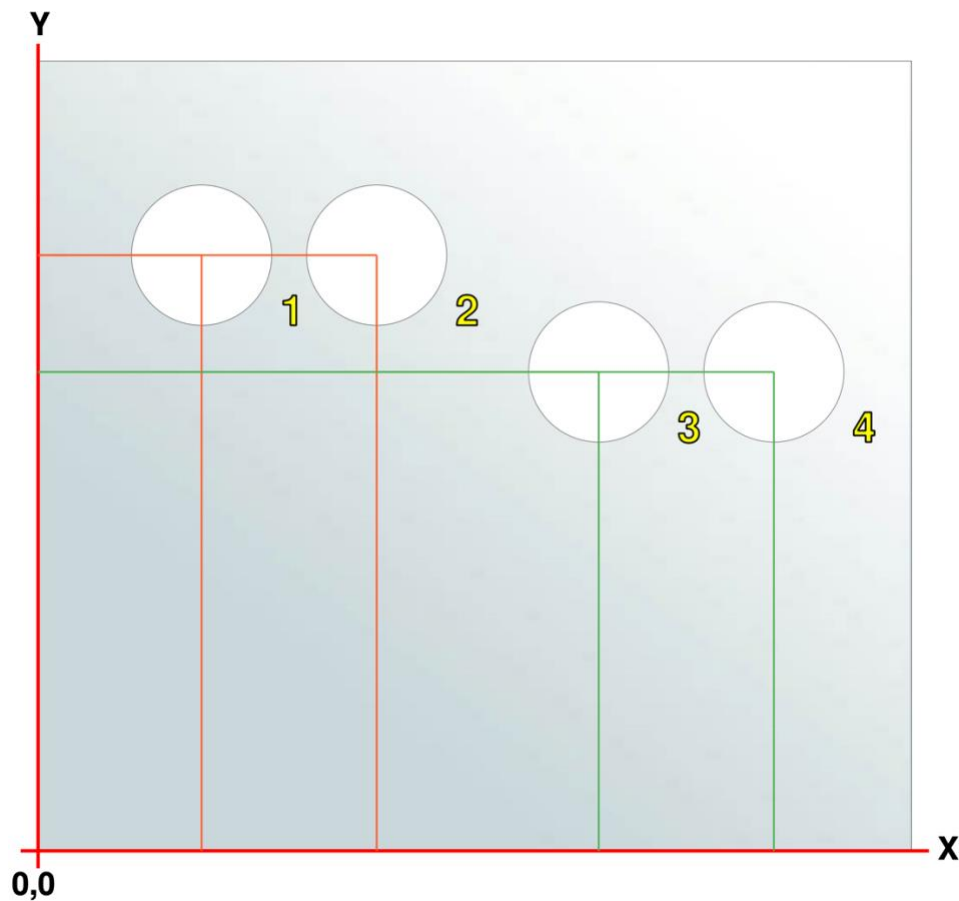

MOUNTING

Thank you for purchasing the fis Audio PC acrylic lid.

The 4 ventilation holes allow for improved passive cooling compared to the standard HDPLEX Gen H5 fanless chassis lid.

We use transparent acrylic with 10mm thickness, dimensions about 37.4cm x 33.8cm. The edge processing is done with a laser. With a laser, the edges are smooth and the light is refracted very nicely depending on the thickness. Due to the high melting point, small imperfections in the acrylic are possible. Due to manual processing sometimes small scratches can not be avoided. Front and back are protected by a film, which must be removed before use.

The delivery includes either 4 rubber buffers or 4 screws for the screwable version. You stick the rubber buffers onto the screw openings of the case. Place the lid carefully and don't correct the position by pushing it to avoid scratches. Instead, lift the lid briefly to correct the position.

Avoid fingerprints and use cotton gloves for lifting, for example. Use a lint-free cloth for cleaning and do not use any corrosive chemicals.

We hope you enjoy using the product.

SUPPORT

We are available to answer your questions and provide assistance. We can best help you if you describe the exact use case that you want to set up or that is causing problems. Screenshots and Photos often help.

The best way to contact us is by e-mail: info@griggaudio.de.

We usually respond to your request within 24 hours.

Address:

Grigg Audio Solutions
Inh. Ronny Gabriel Grigg

Alexander-Fahrenheit-Weg 2
18147 Rostock
Germany